



# NWショートフランジ

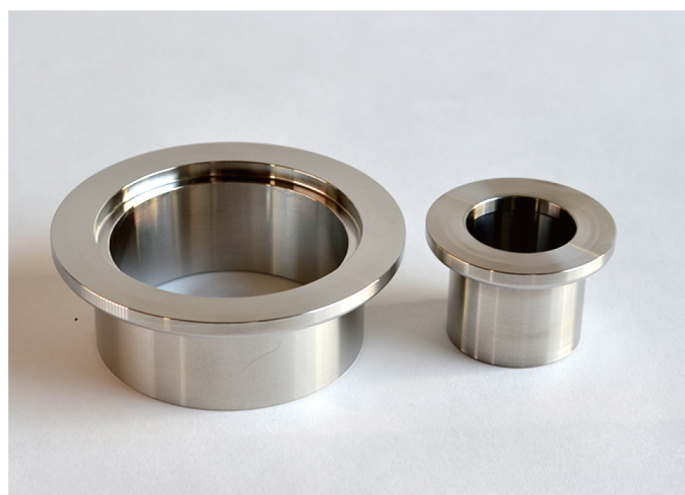

外観寸法図

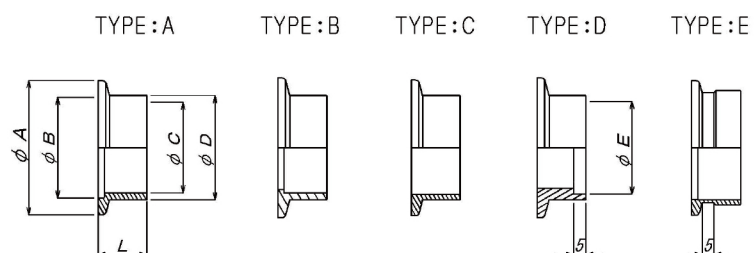

## 特徴

- 材質：SUS304/SUS316L
- SUS316Lの場合は末尾に-6Lと明記
- 保護キャップ付

単位(mm)

| 規格    | 製品コード       | TYPE | φA    | φB    | φC    | φD    | φE    | L  |
|-------|-------------|------|-------|-------|-------|-------|-------|----|
| NW10  | KF10-L10    | A    | 30.0  | 12.2  | 10.0  | 13.8  | —     | 10 |
| NW16  | KF16-L10    | B    | 30.0  | 17.2  | 17.5  | 21.7  | —     | 10 |
|       | KF16-L10-M  | A    | 30.0  | 17.2  | 16.0  | 20.0  | —     | 10 |
| NW25  | KF25-L10    | A    | 40.0  | 26.2  | 23.0  | 27.2  | —     | 10 |
| NW40  | KF40-L10    | A    | 55.0  | 41.2  | 37.1  | 42.7  | —     | 10 |
| NW50  | KF50-L10    | B    | 75.0  | 52.2  | 54.9  | 60.5  | —     | 10 |
| NW10  | KF10-L20    | A    | 30.0  | 12.2  | 10.0  | 13.8  | —     | 20 |
| NW16  | KF16-L20    | B    | 30.0  | 17.2  | 17.5  | 21.7  | —     | 20 |
|       | KF16-L20-K  | E    | 30.0  | 17.2  | 17.5  | 21.7  | —     | 20 |
|       | KF16-L20-M  | A    | 30.0  | 17.2  | 16.0  | 20.0  | —     | 20 |
| NW25  | KF25-L20    | A    | 40.0  | 26.2  | 23.0  | 27.2  | —     | 20 |
|       | KF25-L20-5S | A    | 40.0  | 26.2  | 24.0  | 27.2  | —     | 20 |
| NW40  | KF40-L20    | A    | 55.0  | 41.2  | 37.1  | 42.7  | —     | 20 |
|       | KF40-L20-5S | A    | 55.0  | 41.2  | 39.0  | 42.7  | —     | 20 |
| NW50  | KF50-L20    | B    | 75.0  | 52.2  | 54.9  | 60.5  | —     | 20 |
|       | KF50-L20-5S | B    | 75.0  | 52.2  | 57.2  | 60.5  | —     | 20 |
| NW63  | KF63-L20    | C    | 87.0  | 70.2  | 70.2  | 76.3  | —     | 20 |
| NW80  | KF80-L20-T  | C    | 114.0 | 83.0  | 83.0  | 89.1  | —     | 20 |
|       | KF80-L20-S  | D    | 114.0 | 83.0  | 83.0  | 98.0  | 89.3  | 20 |
| NW100 | KF100-L20-T | B    | 134.0 | 102.0 | 108.3 | 114.3 | —     | 20 |
|       | KF100-L20-S | D    | 134.0 | 102.0 | 102.0 | 118.0 | 114.5 | 20 |
| NW125 | KF125-L20   | D    | 161.0 | 127.0 | 127.0 | —     | 140.8 | 20 |
| NW160 | KF160-L20-T | B    | 190.0 | 153.0 | 158.4 | 165.2 | —     | 20 |
|       | KF160-L20-S | D    | 190.0 | 153.0 | 153.0 | 170.0 | 166.5 | 20 |
| NW200 | KF200-L20-S | D    | 252.0 | 213.0 | 213.0 | —     | 217.8 | 20 |
| NW250 | KF250-L20-S | D    | 301.0 | 261.0 | 261.0 | —     | 269.0 | 20 |