



VGフランジ

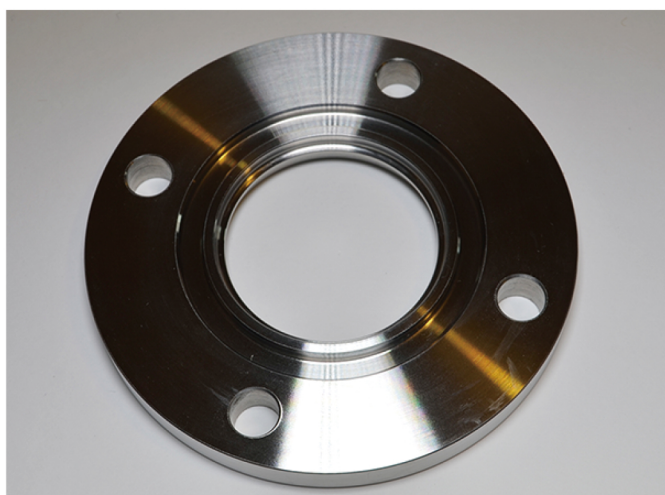

外観寸法図

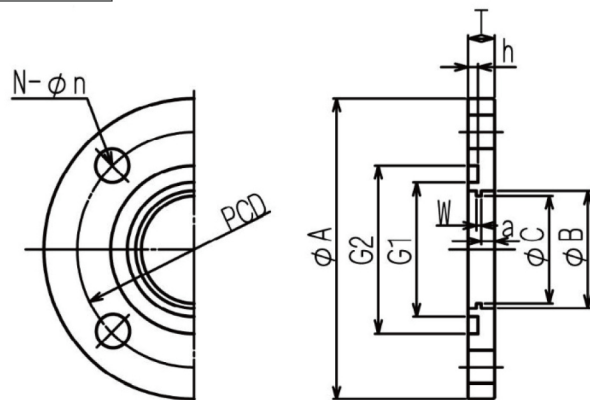

特徴

- SUS304
- SUS316Lの場合は末尾に-6Lと明記下さい。
- タップ穴は受注生産品になります。

穴あきフランジ

単位(mm)

規格	製品コード	適合パイプ	ϕA	T	PCD	N- ϕn	ϕB	ϕC	a	W	G1	G2	h
VG10	VG10-10	17.3	70.0	8.0	50.0	4 $\phi 10$	17.5	15.0	4.0	1.5	24.0	34.0	3.0
VG20	VG20-20	27.2	80.0	8.0	60.0	4 $\phi 10$	28.0	25.0	4.0	1.5	34.0	44.0	3.0
VG25	VG25-25	34.0	90.0	8.0	70.0	4 $\phi 10$	35.0	32.0	4.0	1.5	40.0	50.0	3.0
VG40	VG40-40	48.6	105.0	10.0	85.0	4 $\phi 10$	49.5	46.0	5.0	1.5	55.0	65.0	3.0
VG50	VG50-50	60.5	120.0	10.0	100.0	4 $\phi 10$	61.0	57.0	5.0	2.0	70.0	80.0	3.0
VG65	VG65-65	76.3	145.0	10.0	120.0	4 $\phi 12$	77.0	73.0	5.0	2.0	85.0	95.0	3.0
VG80	VG80-80	89.1	160.0	12.0	135.0	4 $\phi 12$	90.0	86.0	6.0	2.0	100.0	110.0	3.0
VG100	VG100-100	114.3	185.0	12.0	160.0	8 $\phi 12$	115.0	111.0	6.0	2.0	120.0	130.0	3.0
VG125	VG125-125	139.8	210.0	12.0	185.0	8 $\phi 12$	141.0	136.0	6.0	2.0	150.0	160.0	3.0
VG150	VG150-150	165.2	235.0	12.0	210.0	8 $\phi 12$	166.0	161.0	6.0	2.0	175.0	185.0	3.0
VG200	VG200-200	216.3	300.0	16.0	270.0	8 $\phi 15$	218.0	212.0	8.0	3.0	225.0	241.0	4.5
VG250	VG250-250	267.4	350.0	16.0	320.0	12 $\phi 15$	269.0	263.0	8.0	3.0	275.0	291.0	4.5
VG300	VG300-300	318.5	400.0	16.0	370.0	12 $\phi 15$	320.0	314.0	8.0	3.0	325.0	341.0	4.5