


NWブランクフランジ



外観寸法図

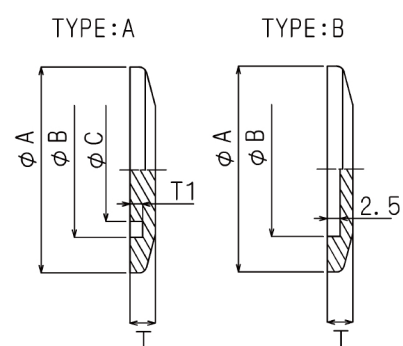

特徴

- 材質：SUS304/SUS316L
- SUS316Lの場合は末尾に-6Lと明記
- 保護キャップ付

単位(mm)

規格	製品コード	TYPE	φA	φB	φC	T	T1
NW10	KF10-B0	A	30.0	12.2	6.0	5.0	2.5
NW16	KF16-B0	A	30.0	17.2	6.0	5.0	2.5
NW25	KF25-B0	A	40.0	26.2	20.0	5.0	2.5
NW40	KF40-B0	A	55.0	41.2	35.0	5.0	2.5
NW50	KF50-B0	A	75.0	52.2	46.0	5.0	2.5
NW63	KF63-B0	A	87.0	70.2	64.0	5.0	2.5
NW80	KF80-B0	A	114.0	83.0	73.0	11.0	6.5
NW100	KF100-B0	A	134.0	102.0	92.0	11.0	6.5
NW160	KF160-B0	A	190.0	153.0	143.0	11.0	6.5
NW200	KF200-B0	A	252.0	213.0	203.0	11.0	6.5
NW10	KF10-B	B	30.0	12.2	—	5.0	—
	KF10-B1	B	30.0	12.2	—	6.0	—
NW16	KF16-B	B	30.0	17.2	—	5.0	—
	KF16-B1	B	30.0	17.2	—	6.0	—
NW25	KF25-B	B	40.0	26.2	—	5.0	—
	KF25-B1	B	40.0	26.2	—	6.0	—
NW40	KF40-B	B	55.0	41.2	—	5.0	—
	KF40-B1	B	55.0	41.2	—	6.0	—
NW50	KF50-B	B	75.0	52.2	—	5.0	—
	KF50-B1	B	75.0	52.2	—	6.0	—